


180° Angular Gripper

Cam Style

Rack & Pinion Style

Series *MHY2/MHW2*

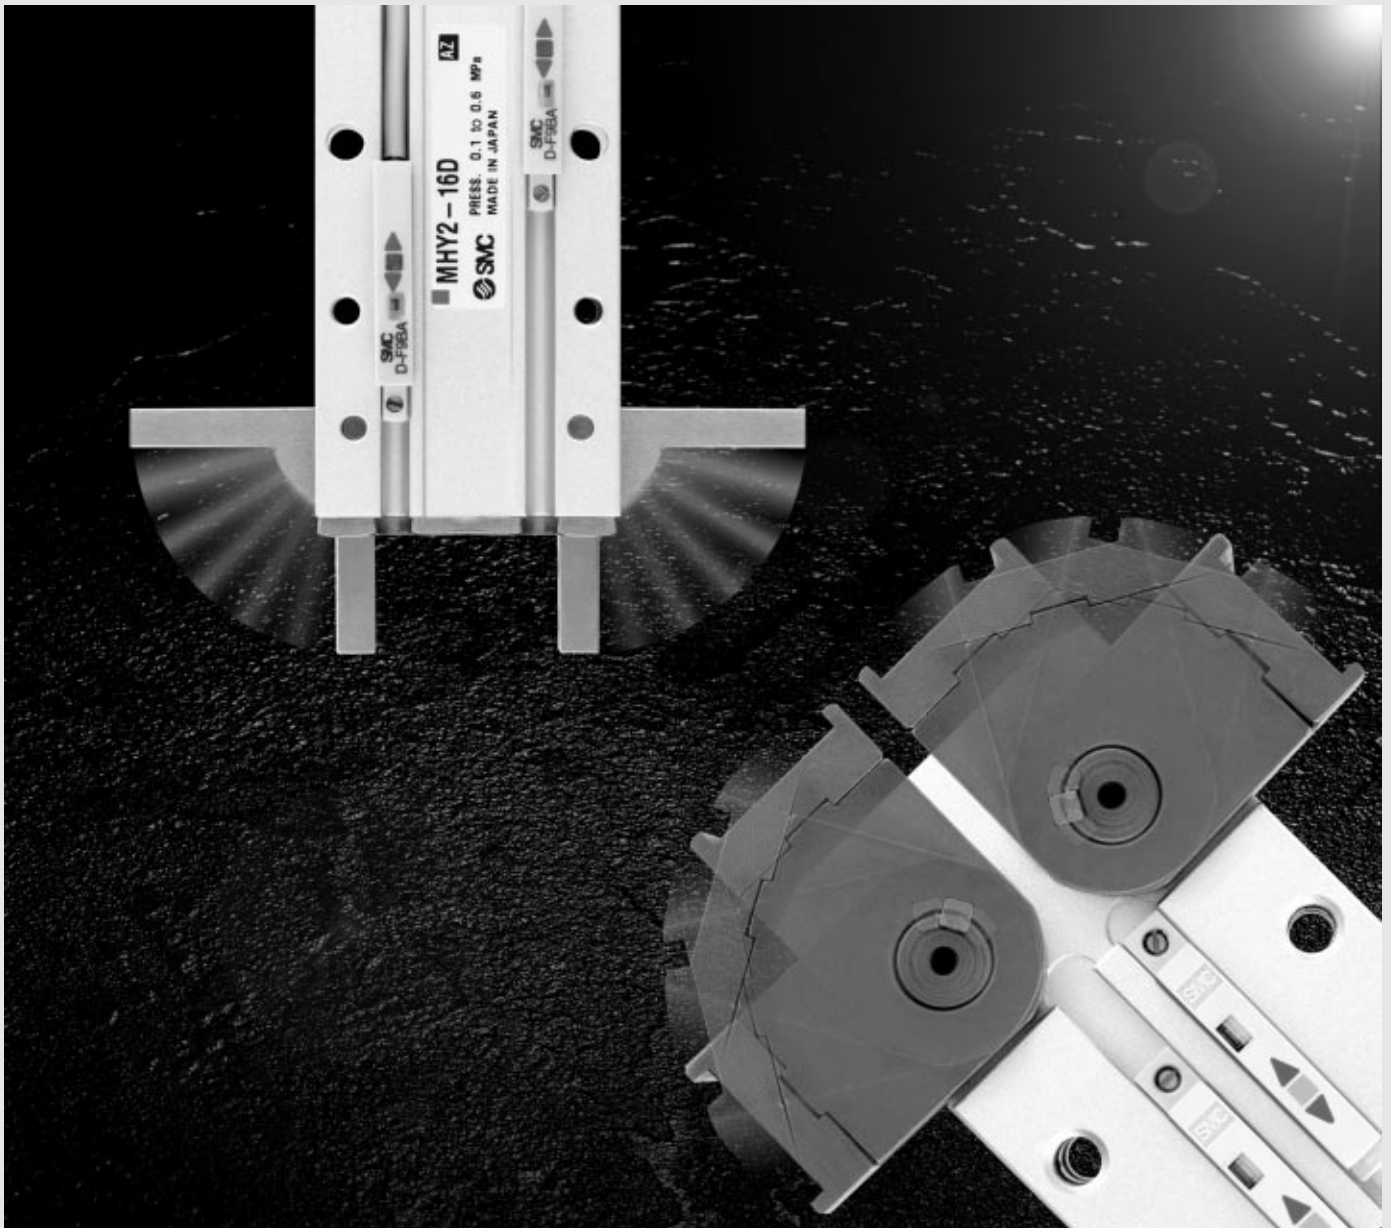

MHZ2

MHZJ2

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2

MRHQ

Auto switch

Cam actuation style is now standardized !

180° Angular Gripper

Cam Style

Rack & Pinion Style


Series MHY2/MHW2

Series MHY/Cam Style

Light and compact size in small bore sizes

Model	Bore size mm	Effective holding moment* Nm	Overall length Lmm	Weight g
MHY2-10D	10	0.16	71	70
MHY2-16D	16	0.54	84	150
MHY2-20D	20	1.10	106	320
MHY2-25D	25	2.28	131	560

*At pressure of 0.5MPa

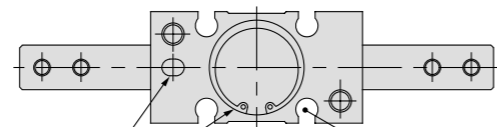




Improved mounting repeatability

Auto switch mounting at 4 locations

Stainless steel fingers are standard.

Resistance to dusty environments

Reduced opening sizes helps prevent foreign substance from entering.

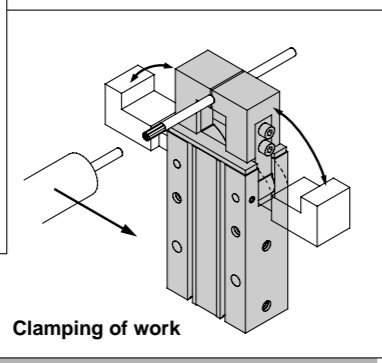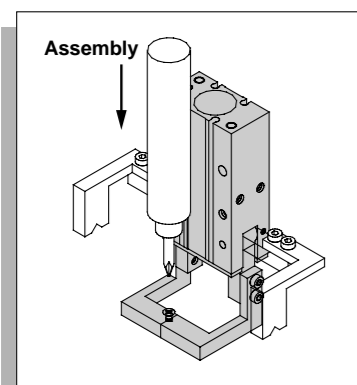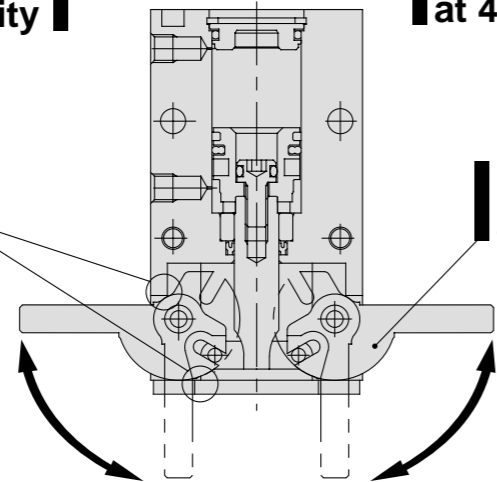


Variation

	Bore size (mm)						Applicable auto switch	Page
	10	16	20	25	32	40		
Cam style Series MHY	●	●	●	●	●	●	Solid state switch D- F9/F9 □ W type Water resistant 2 color indication D-F9BA Type	P.2.8-8 to 2.8-15
Rack & Pinion style Series MHW			●	●	●	●	Solid state switch D-Y5/Y6 type D-Y7 type Water resistant 2 color indication D-Y7BA type	P.2.8-16 to 2.8-23

Series MHW/Rack & Pinion Style

Unique seal design allows shorter total length construction and constant holding force when opening and closing fingers. (PAT.PEND)

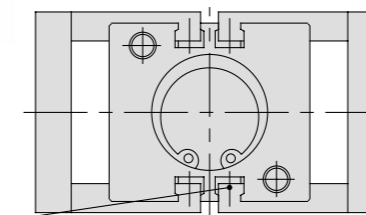

Model	Bore size mm	Holding mement* Nm	Over length Lmm	Weight g
MHW2-20D	20	0.30	68	300
MHW2-25D	25	0.73	78	510
MHW2-32D	32	1.61	93.5	905
MHW2-40D	40	3.70	117.5	2135
MHW2-50D	50	8.27	154	5100

*At the pressure of 0.5MPa

Auto switch mounting at 4 locations



Key connection is ideal for impact resistance.

Key connection between finger and shaft prevents finger angle slippage during impact.

Two finger styles available.

Flat finger type

Right angle finger type




Dust proof construction


Seal arrangement protects gripper from harsh dusty environments.

Bearings are standard.

Clamping work

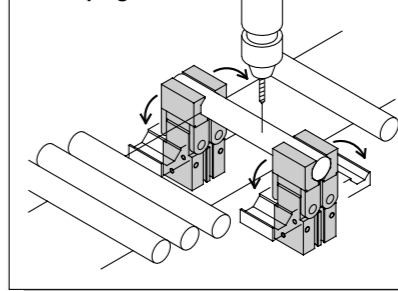

Transferring work

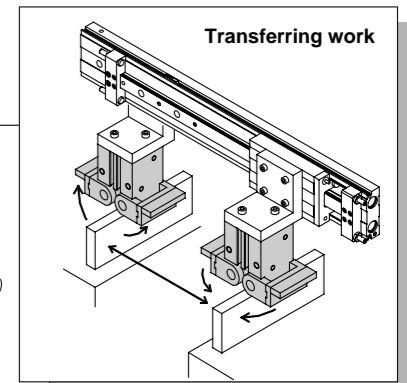

MHZ2

MHZJ2

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2

MRHQ


Auto switch

Series MHY2/MHW2


How to Select the Applicable Model

How to Select

Procedure



Step 1 Confirm holding force




Example Work weight: 0.05kg

Guidelines on model selection according to work weight

- Although the condition differs according to the coefficient of friction between the attachment and work, select a model that can produce a holding force of 10 to 20 times the work weight.
- Further allowance should be provided when great acceleration or impact is expected during work transfer.

Ex.) For setting the holding force to be at least 20 times the work weight;
 Required holding force = $0.05\text{kg} \times 20 \times 9.8\text{m/s}^2$
 = 10N min.

MHY2-16D



- When MHY2-16D is selected, the holding force is determined to be 13N according to the holding point distance (L = 35mm) and the pressure (0.6MPa).
- The holding force is 26 times the work weight meeting the guideline that holding force should be more than 20 times the set holding force value.


Holding point L = 35mm

Operating pressure: 0.6MPa


Effective holding force

Series MHY2/MHW2 Double acting


- Indication of effective holding force
 The holding force shown in the tables represents the holding force of one finger when all fingers and attachments are in contact with the work.
 (F: Thrust of one finger)




External hold




MHY2-10D

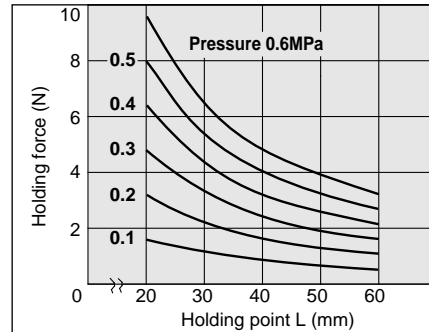


MHY2-20D

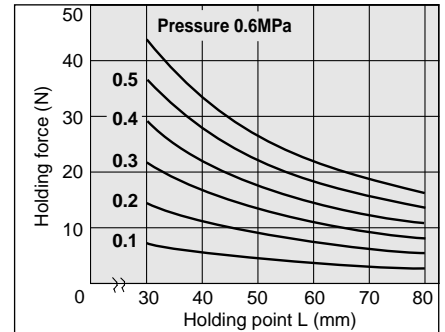


MHY2-16D

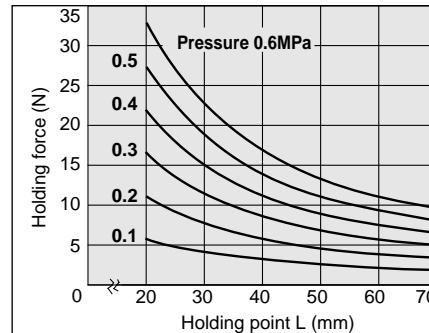


MHY2-25D

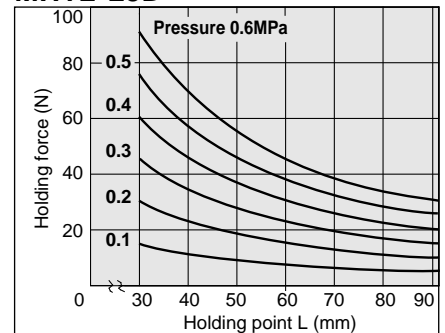


MHW2-20D

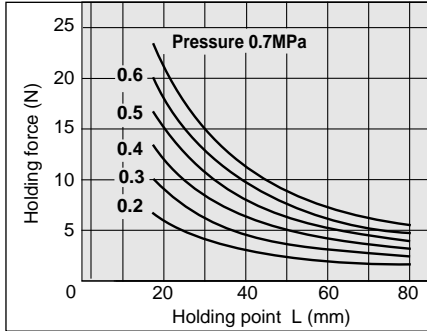


MHW2-32D

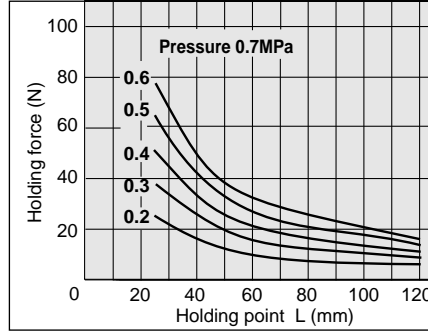


MHW2-50D

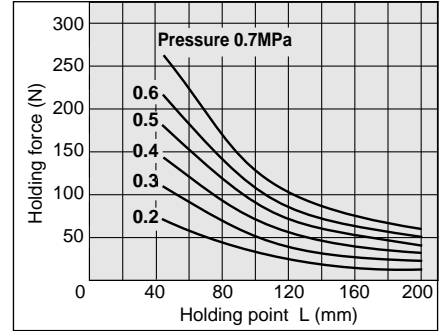

MHW2-25D

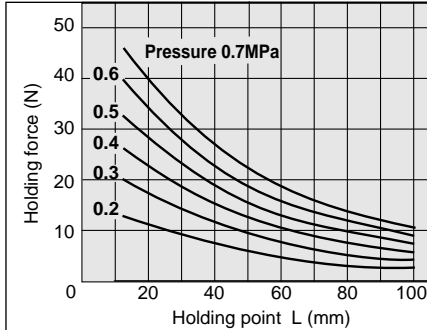

MHW2-40D

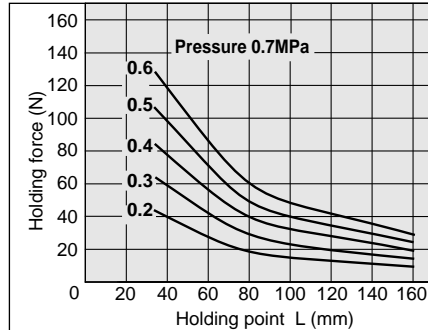

MHZ2

MHZJ2

MHQ


MHL2

MHR


MHK

MHS


Step 2 Confirmation of holding point



MHY

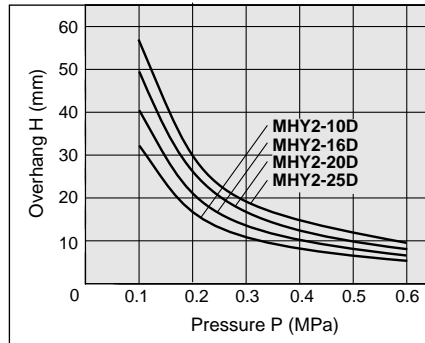

MHW

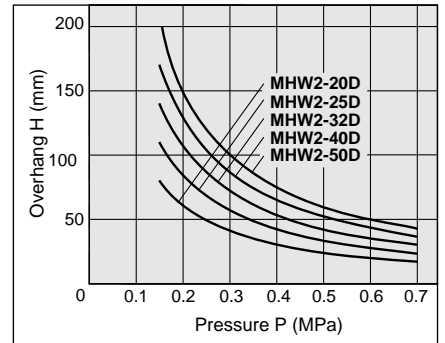

MHC2

MHT2

MHY2

MHW2

MRHQ


Auto switch

- Work should be held at a point within the range of overhanging distance (H) for a given pressure indicated in the tables on the right.
- When the work is held at a point outside of the recommended range for a given pressure, it may cause adverse effect on the product life.


Series MHY2/MHW2






How to Select the Applicable Model

Step 3 Confirm moment of inertia of attachments



Confirm the moment of inertia for the attachment at one side.
Calculate the moment of inertia for A and B separately as shown in the figures on the right.

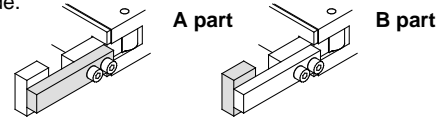

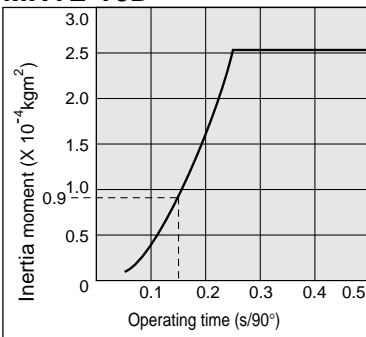Procedure	Formula	Calculation example
<p>1 Check the operating conditions, dimensions of attachment, etc.</p>	<p>A part</p>  <p>B part</p> 	<p>Operating model: MHY2-16D Opening time: 0.15s a = 40 (mm) b = 7 (mm) c = 8 (mm) d = 5 (mm) e = 10 (mm) f = 12 (mm)</p>
<p>2 Calculate the moment of inertia of attachment.</p>	<p>A part</p>  <p>Calculation of weight $m_1 = a \times b \times c \times \text{Specific gravity}$</p> <p>Moment of inertia around Z1 axis $I_{z1} = \{m_1(a^2 + b^2)/12\} \times 10^{-6}$*</p> <p>Moment of inertia around Z axis $I_A = I_{z1} + m_1 r_1^2 \times 10^{-6}$*</p> <p>B part</p>  <p>Calculation of weight $m_2 = d \times e \times f \times \text{Specific gravity}$</p> <p>Moment of inertia around Z2 axis $I_{z2} = \{m_2(d^2 + e^2)/12\} \times 10^{-6}$*</p> <p>Moment of inertia around Z axis $I_B = I_{z2} + m_2 r_2^2 \times 10^{-6}$*</p> <p>Total moment of inertia (*: constant for unit conversion) $I = I_A + I_B$</p>	<p>Material of attachment: Aluminum alloy (Specific gravity = 2.7) $r_1 = 37$ (mm)</p> <p>$m_1 = 40 \times 7 \times 8 \times 2.7 \times 10^{-6}$ $= 0.006$(kg)</p> <p>$I_{z1} = \{0.006 \times (40^2 + 7^2)/12\} \times 10^{-6}$ $= 0.8 \times 10^{-6}$ (kgm²)</p> <p>$I_A = 0.8 \times 10^{-6} + 0.006 \times 37^2 \times 10^{-6}$ $= 9.0 \times 10^{-6}$(kgm²)</p> <p>$r_2 = 47$(mm)</p> <p>$m_2 = 5 \times 10 \times 12 \times 2.7 \times 10^{-6}$ $= 0.002$(kg)</p> <p>$I_{z2} = \{0.002 \times (5^2 + 10^2)/12\} \times 10^{-6}$ $= 0.02 \times 10^{-6}$ (kgm²)</p> <p>$I_B = 0.02 \times 10^{-6} + 0.002 \times 47^2 \times 10^{-6}$ $= 4.4 \times 10^{-6}$ (kgm²)</p> <p>$I = 9.0 \times 10^{-6} + 4.4 \times 10^{-6}$ $= 13.4 \times 10^{-6} = 0.13 \times 10^{-4}$ (kgm²)</p>
<p>3 Determine the allowable moment of inertia from the graph.</p>	<p>MHY2-16D</p> 	<p>The moment of inertia is determined to be 0.9×10^{-4} (kgm²) according to the operating time (0.15s) from the graph on the left.</p>
<p>4 Confirm the moment of inertia of one attachment is within the allowable range.</p>	<p>Moment of inertia of attachment < Allowable moment of inertia</p>	<p>0.13×10^{-4} (kgm²) < 0.9×10^{-4} (kgm²) Possible to use this model MHY2-16D completely.</p>


Symbol

Symbol	Definition	Unit
Z	Finger rotation axis	—
Z1	Axis on the center gravity of A part of attachment and parallel to Z	—
Z2	Axis on the center gravity of B part of attachment and parallel to Z	—
I	Total moment of inertia for attachment	kgm ²
Iz1	Inertia moment around the Z1 axis of A part of attachment	kgm ²
Iz2	Inertia moment around the Z2 axis of B part of attachment	kgm ²


Symbol	Definition	Unit
IA	Moment of inertia around the Z axis of A part of attachment	kgm ²
IB	Moment of inertia around the Z axis of B part of attachment	kgm ²
m1	Weight of A part of attachment	kg
m2	Weight of B part of attachment	kg
r1	Distance between Z and Z1 axis	mm
r2	Distance between Z and Z2 axis	mm

Allowable range of inertia moment of attachment


MHY2-10D

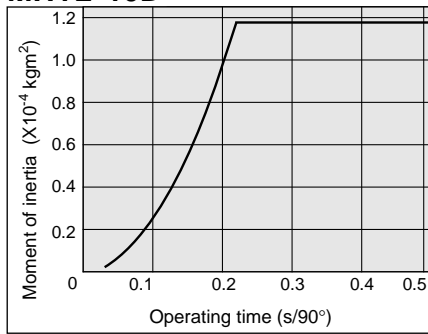


MHW2-20D

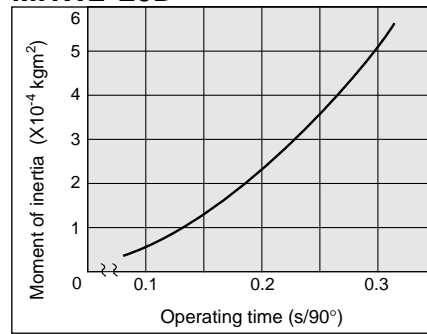


MHW2-50D

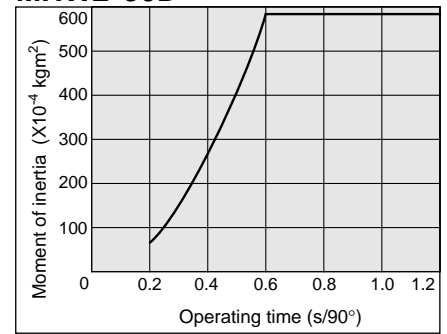


MHY2-16D

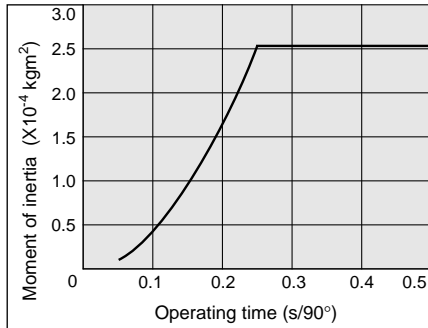


MHW2-25D

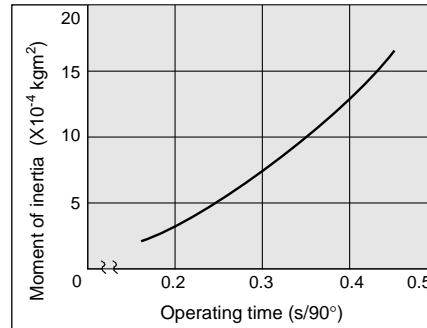


MHY2-20D

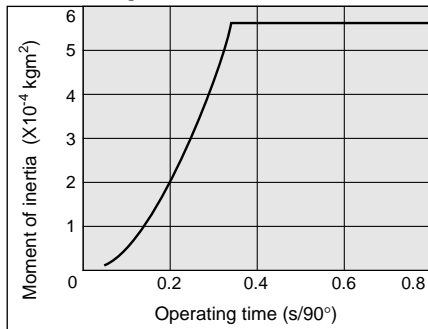


MHW2-32D

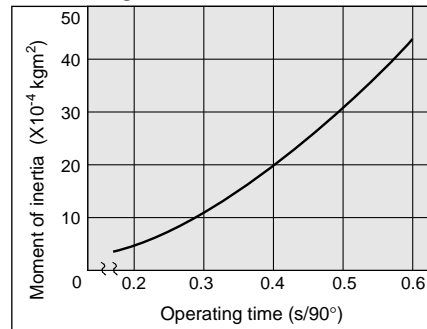

MHY2-25D

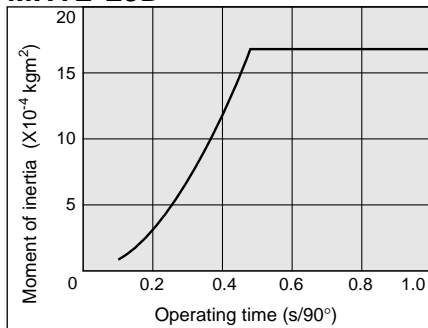

MHW2-40D

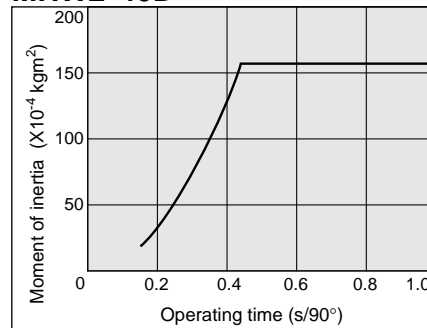

MHZ2

MHZJ2

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2


MRHQ

Auto switch

Series *MHY2*

∅10, ∅16, ∅20, ∅25

How to Order

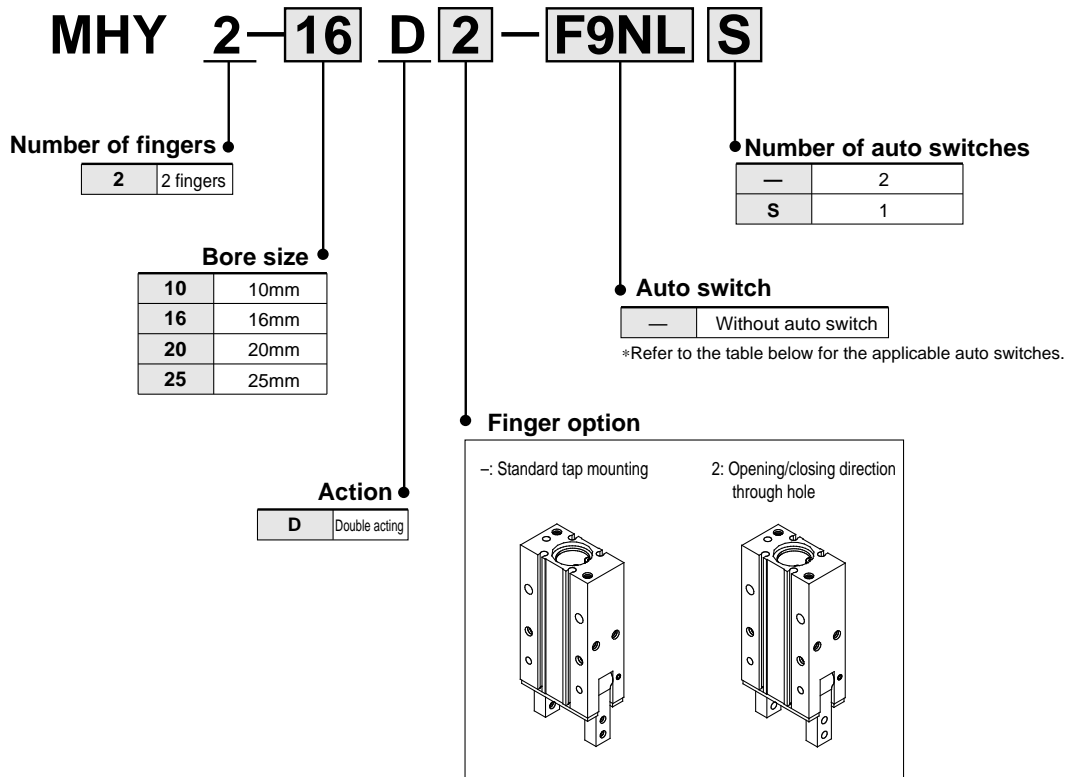

Applicable Auto Switches

Type	Special function	Electrical entry	Indicator	Wiring (Output)	Load voltage		Symbol		Lead wire length (m)		Applicable load		
					DC	AC	Electrical entry		0.5 (-)	3 (L)			
							Perpendicular	In-line					
Solid state	—	Grommet	With	3 wire (NPN)	24V	—	F9NV	F9N	●	●	Relay PLC		
				3 wire (PNP)					5V	●		●	
				2 wire					12V	●		●	
	3 wire (NPN)			5V 12V					●	●			
	3 wire (PNP)								F9NWV	F9NW		●	●
	2 wire								12V	F9PWV		F9PW	●
								●	●				



*Lead wire length: 0.5m.....— (Example) F9N
3m.....L (Example) F9NL
Note 1) Refer to "Auto Switch Specifications" on p.2.11-1.

Specifications




Fluid	Air
Operating pressure	0.1 to 0.6MPa
Ambient and fluid temperature	-10 to 60°C
Repeatability	±0.2mm
Max. operating frequency	60c.p.m
Lubrication	Not required
Action	Double acting
Auto switch (Optional) ^{Note)}	Solid state switch (3 wire, 2 wire)



Note) Refer to p. 2.11-1 for details of auto switch specifications.

Symbol

Double acting



Model

Model	Bore size (mm)	Effective holding force (Nm) ⁽¹⁾	Opening angle (Both sides)		Weight ⁽²⁾ (g)
			Opening side	Closing side	
MHY2-10D	10	0.16	180°	-3°	70
MHY2-16D	16	0.54			150
MHY2-20D	20	1.10			320
MHY2-25D	25	2.28			560



Note 1) At the pressure of 0.5MPa

Note 2) Not including auto switch



• Refer to the "How to Select the Applicable Model" on p.2.8-4.

• Refer to p.2.8-4 and 2.8-5 for the details of effective holding force and allowable overhanging distance.

MHZ2

MHZJ2

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2


MRHQ

Auto switch


Series MHY2

Construction

Closed

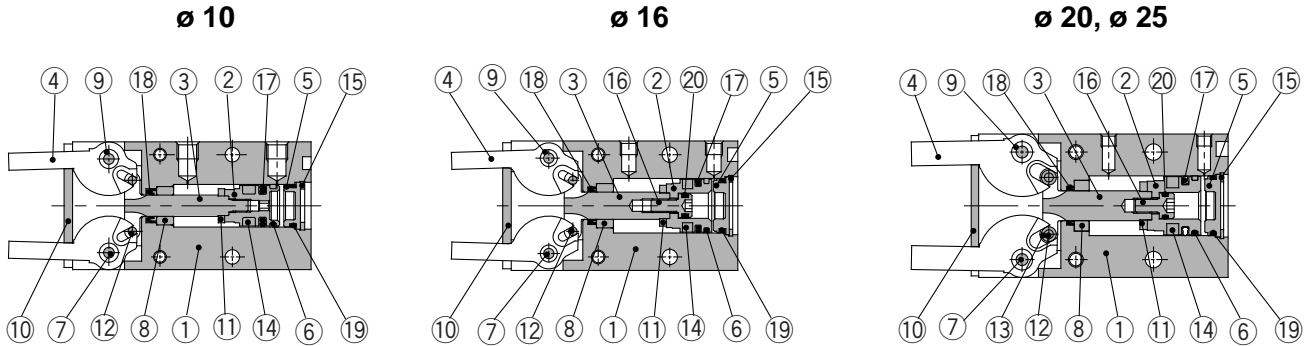

Open

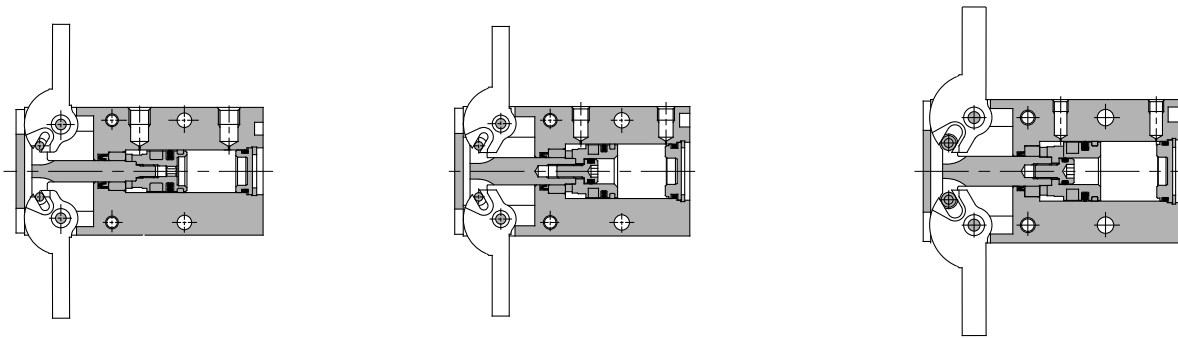

Component Parts

No.	Description	Material	Note
①	Body	Aluminum alloy	Hard anodized
②	Piston	ø10: Stainless steel ø16 to 25: Aluminum alloy	ø16 to 25: Chromated
③	Joint	Stainless steel	Heat treatment
④	Finger	Stainless steel	Heat treatment
⑤	Cap	Resin	
⑥	Ware ring	Resin	
⑦	Shaft	Stainless steel	Nitriding
⑧	Bushing A	Sintered alloy steel	

Component Parts

No.	Description	Material	Note
⑨	Bushing B	Sintered alloy steel	
⑩	End plate	Stainless steel	
⑪	Bumper	Urethane rubber	
⑫	Cylindrical roller	High carbon chrome bearing steel	
⑬	Joint roller	Carbon steel	Nitriding
⑭	Rubber magnet	Synthetic rubber	
⑮	C-shape snap ring	Carbon steel	Nickel plated
⑯	Piston bolt	Stainless steel	



Replacement Parts: Seal Kits

No.	Description	Material	Kit No.			
			MHY2-10D	MHY2-16D	MHY2-20D	MHY2-25D
⑰	Seal kit	NBR	MHY10-PS	MHY16-PS	MHY20-PS	MHY25-PS
⑱						
⑲						
⑳						


Series MHY2

Dimensions

MHY2-16D

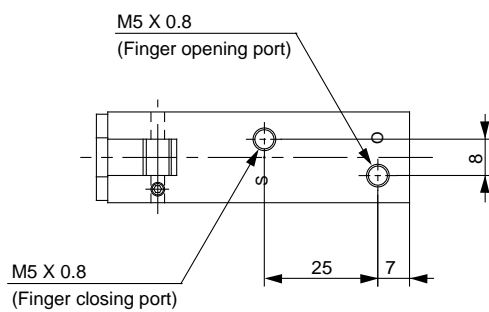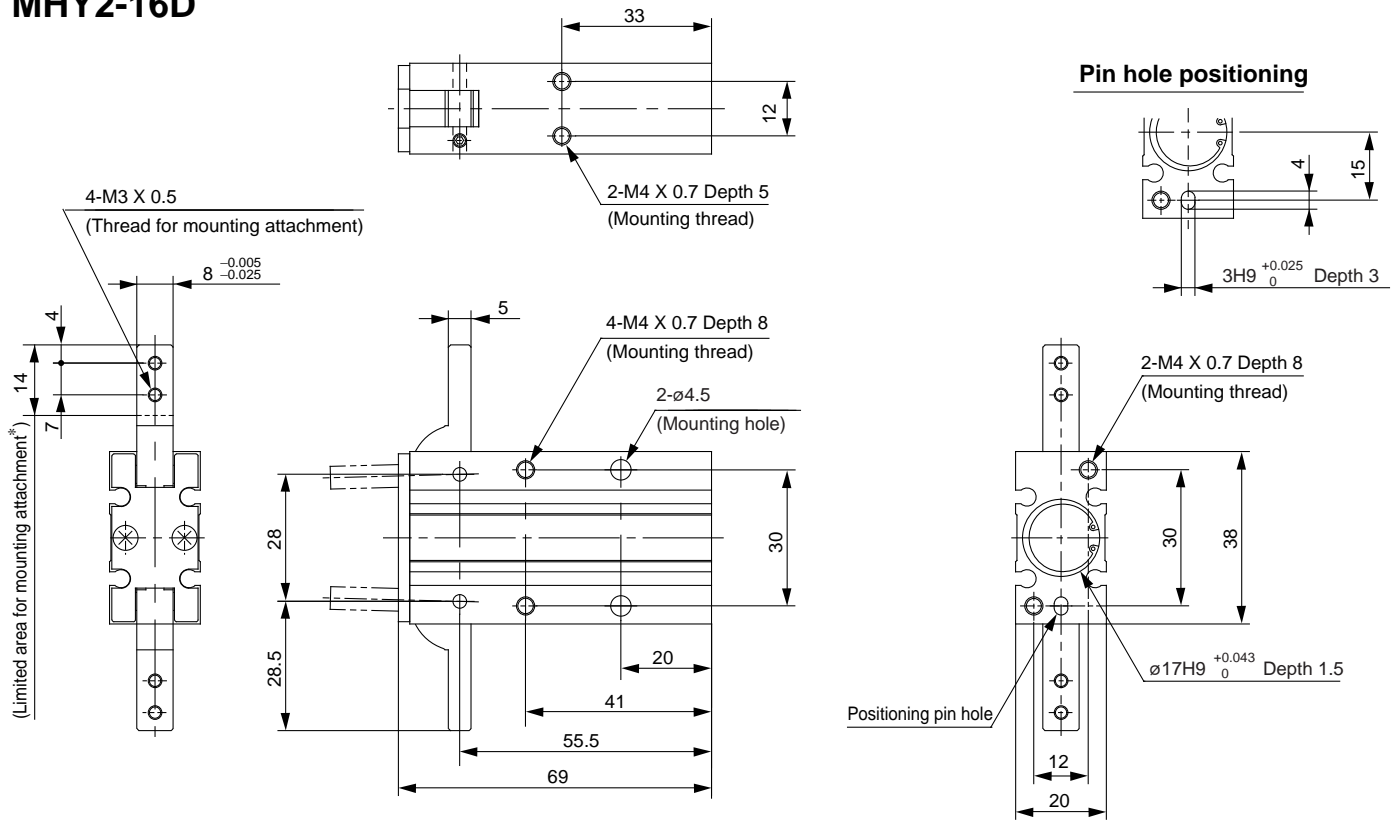


Auto switch mounting groove position

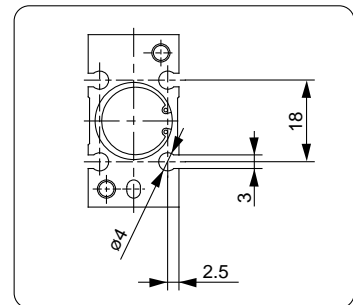


MHY2-16D2

Opening/closing direction through hole type

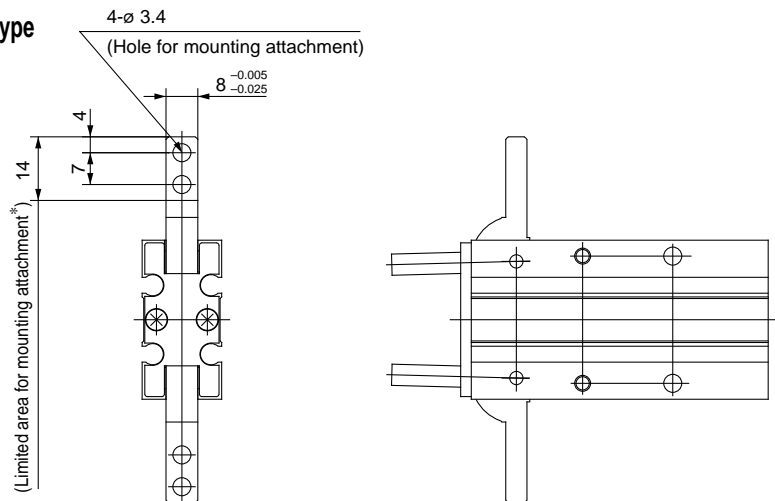


* Do not extend the attachment from limited area for mounting to avoid interference with the attachment or main body.

MHY2-20D

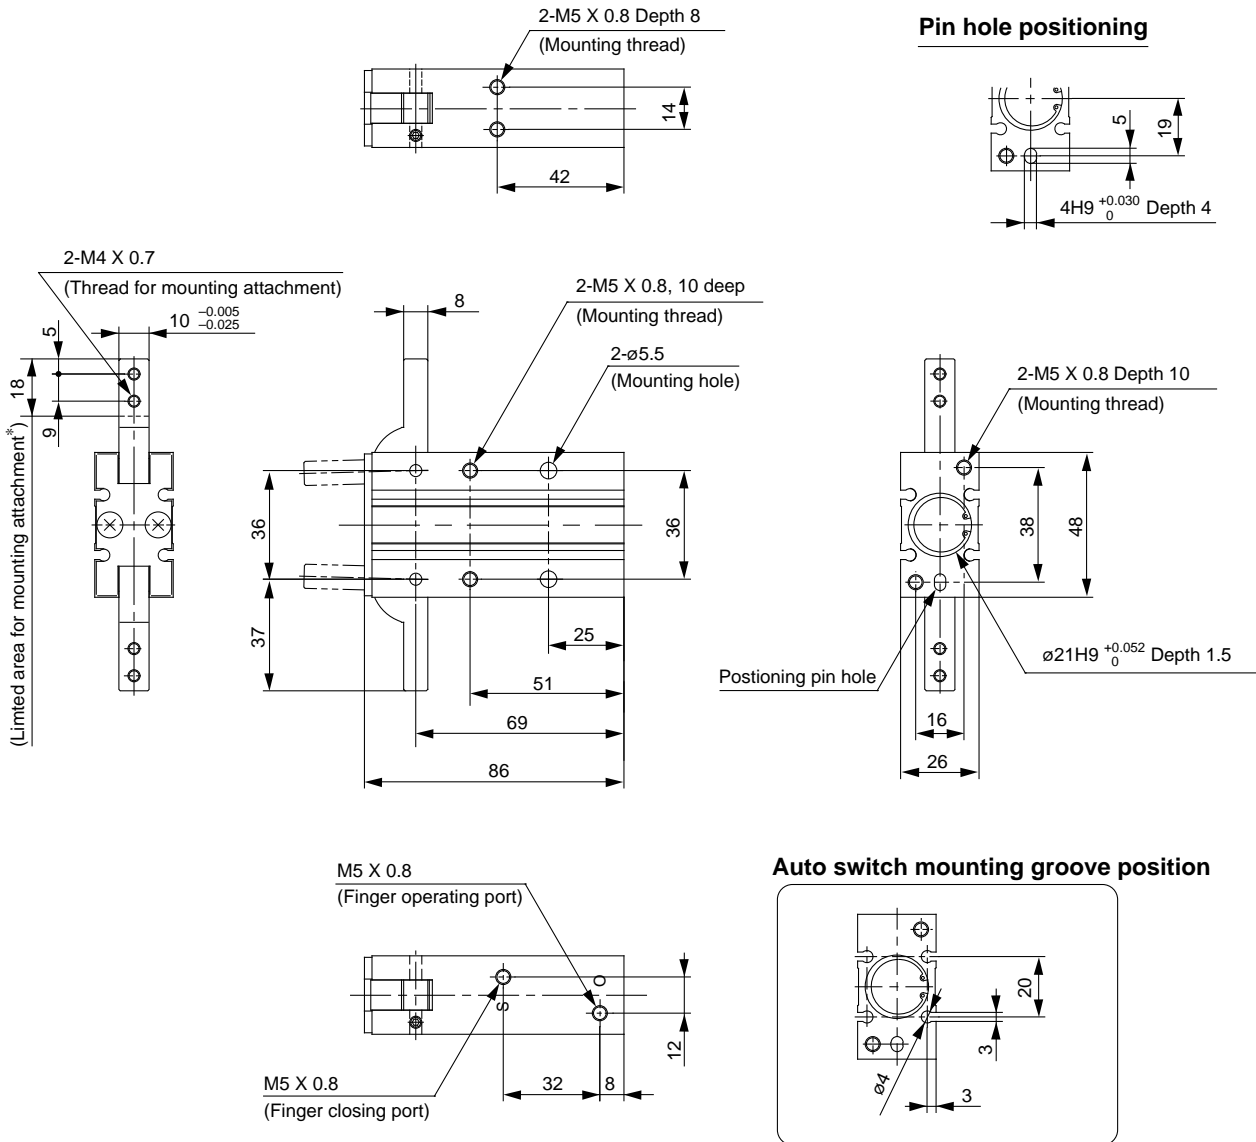

MHY2-20D2

Opening/closing direction through hole type

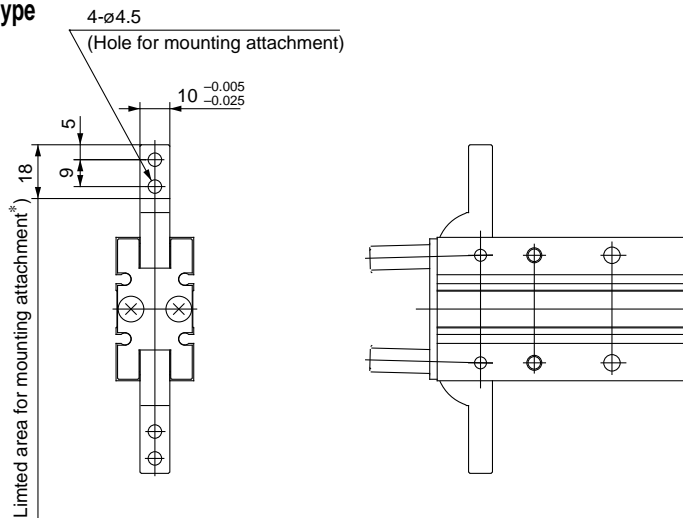

* Do not extend the attachment from limited area for mounting to avoid interference with the attachment or main body.

MHZ2

MHZJ2

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2



MRHQ

Auto switch


Series MHY2

Dimensions

MHY2-25D

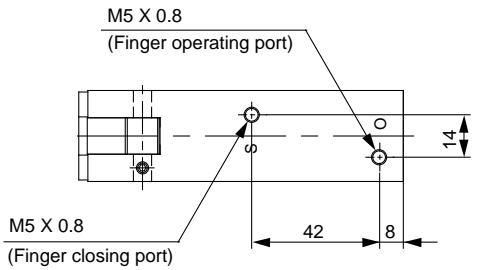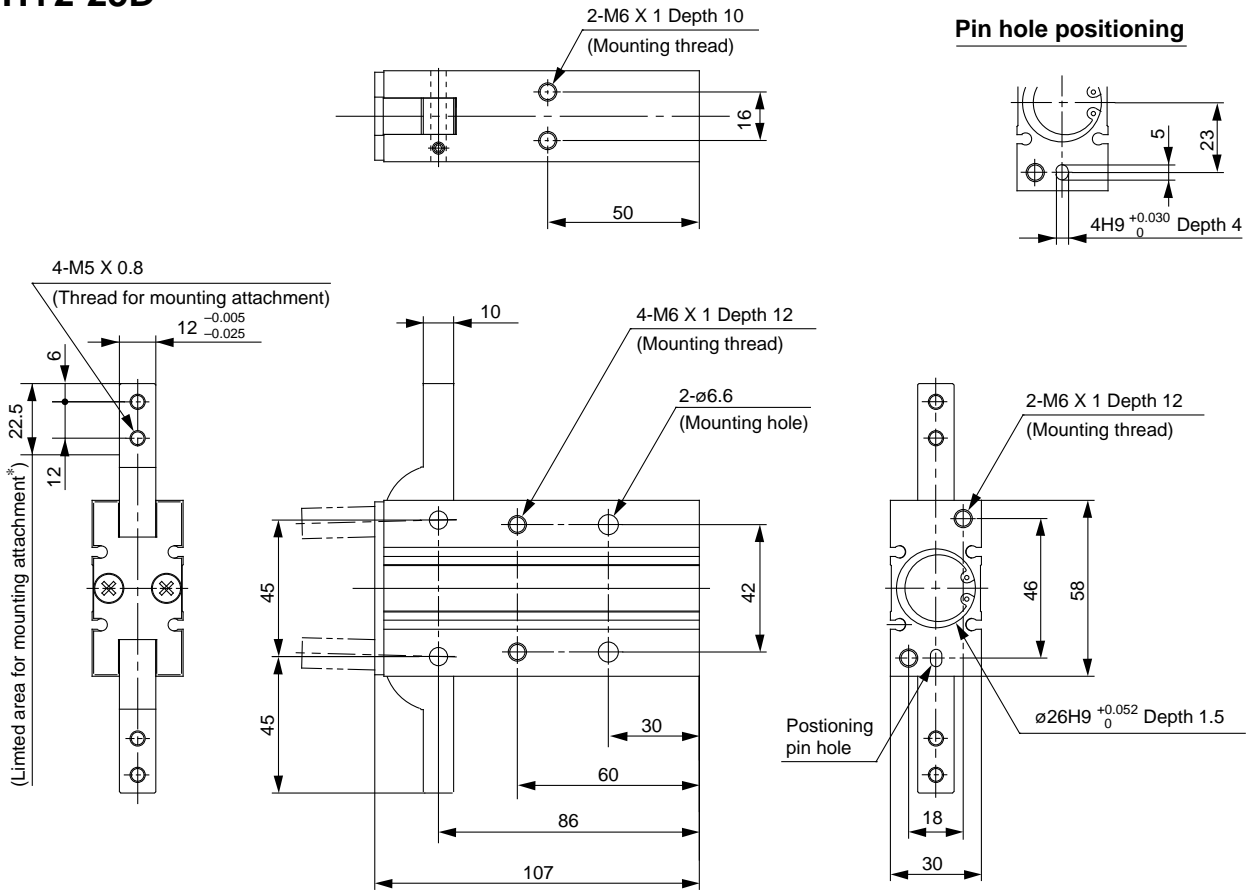


Auto switch mounting groove position

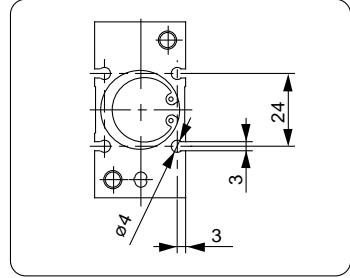

MHY2-25D2


Opening/closing direction through hole type

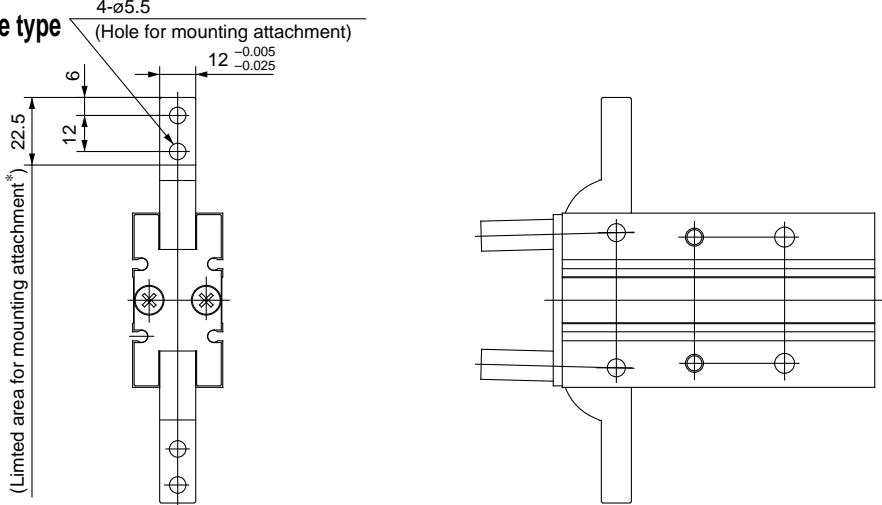

* Do not extend the attachment from limited area for mounting to avoid interference with the attachment or main body.

Setting Method of Auto Switch

To set the auto switch, insert the auto switch into the installation groove of the gripper from the direction indicated in the following drawing. After establishing the installation position, tighten the attached switch mounting screw with a straight bladed watchmakers screwdriver.

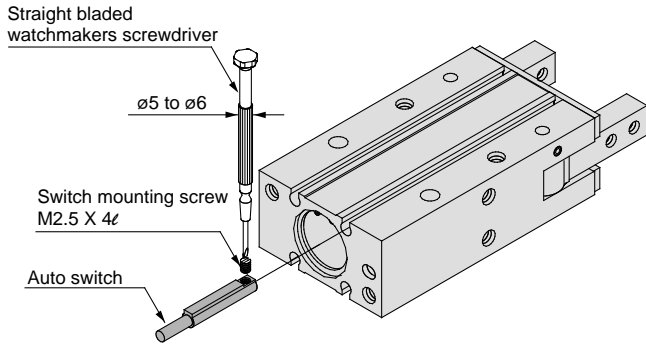


Note) Use a watchmakers screwdrivers with a grip diameter of 5 to 6 mm to tighten the auto switch mounting screw. Use a tightening torque of 0.05 to 0.1Nm. As a rough guide, tighten the screw an additional 90° after feeling a tighter resistance.

*Refer to the p.2.11-7 for the details of "Solid State Switch /Connection Method and Connection Example".

Auto Switch Hysteresis

Auto switches have a differential like a micro switch. Please refer to the following table as a guide when setting auto switch positions.

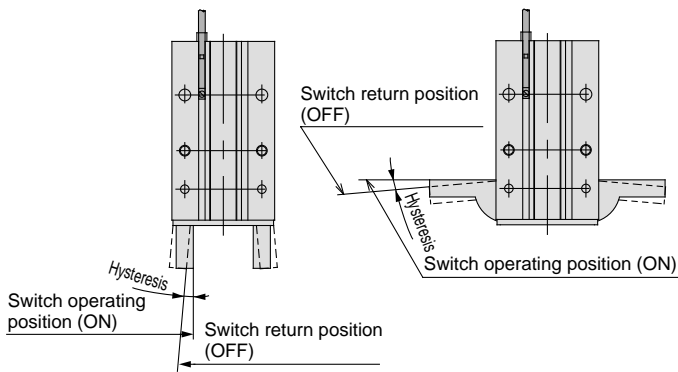


		D-F9N(V) D-F9B(V)	D-F9NW(V)		D-F9BA	
			Red light at ON	Green light at ON	Red light at ON	Green light at ON
MHY2-10D	Finger fully closed	2°	2°	4°	2°	3°
	Finger fully open	4°	4°	7°	4°	5°
MHY2-16D	Finger fully closed	2°	2°	4°	2°	2°
	Finger fully open	3°	3°	6°	3°	4°
MHY2-20D	Finger fully closed	2°	2°	3°	2°	2°
	Finger fully open	3°	3°	5°	3°	3°
MHY2-25D	Finger fully closed	1°	1°	3°	1°	2°
	Finger fully open	2°	2°	5°	2°	3°


Projection of Auto Switch from Body Edge

The projection of an auto switch from the edge of the body is shown in the table below. Use the table as a guideline for mounting.


Note) 2 color indicator type and perpendicular entry type protrude in the direction of the lead wire entry.



When auto switch D-F9N is used

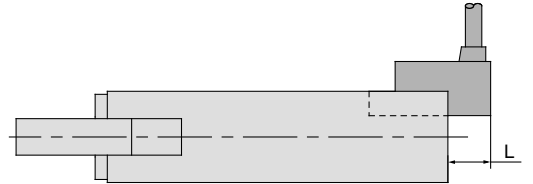

When auto switch D-F9□V is used

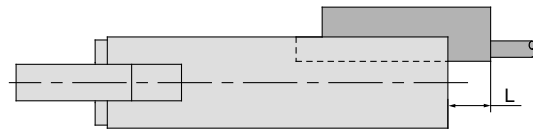

When auto switch D-F9BA is used

Max. protrusion of auto switch from edge of body (L) Unit: mm

Gripper Model No.	Auto switch model No.	Protrusion						
		In-line			Perpendicular			
		D-F9N	D-F9B	D-F9BA	D-F9NW	D-F9NV	D-F9BV	D-F9NWV
MHY2-10D	O	—	—	—	—	—	—	—
	S	3	8	13	6	1	1	8
MHY2-16D	O	—	—	—	—	—	—	—
	S	3	8	13	7	1	1	8
MHY2-20D	O	—	—	—	—	—	—	—
	S	—	5	10	4	—	—	5
MHY2-25D	O	—	—	—	—	—	—	—
	S	—	3	9	3	—	—	3

MHZ2

MHZJ2

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2

MRHQ

Auto switch

Solid-state Auto Switches for Direct Mounting Series D-M9N(V)/D-M9P(V)/D-M9B(V)



Grommet

- Reduced load currents for two-wire model (2.5 to 40 mA)
- Compliance with lead-free requirements
- Use of UL-approved lead wires (style 2844)



Auto Switch Specifications

PLC: Programmable Logic Controller

D-M9□/D-M9□V (with Indicator light)						
Model number	D-M9N	D-M9NV	D-M9P	D-M9PV	D-M9B	D-M9BV
Electrical entry	In-line	Perpendicular	In-line	Perpendicular	In-line	Perpendicular
Wiring	Three-wire			Two-wire		
Output	NPN		PNP		—	
Applicable load	Integrated circuit, relay and PLC				24 V DC relay and PLC	
Power voltage	5, 12, or 24 V DC (4.5 to 28 V DC)				—	
Current consumption	10 mA or less				—	
Load voltage	28 V DC or less		—		24 V DC (10 to 28 V DC)	
Load current	40 mA or less				2.5 to 40 mA	
Internal voltage drop	0.8 V or less				4 V or less	
Leakage current	100 μA max. at 24 V DC				0.8 mA or less	
Indicator light	Red LED lights when ON.					


- Lead wire: oil-proof heavy-duty vinyl cable
 2.7 x 3.2 with elliptic cross-section, 0.15 mm², two cores (D-M9B),
 or three cores (D-M9N and D-M9P)

Solid state switch specifications


Leakage current	3-wire: 100 μA or less; 2-wire: 0.8 mA max.
Operating time	1 ms or less
Impact resistance	1000 m/s ²
Insulation resistance	50 MΩ or more at 500 V DC (between lead wire and case)
Withstand voltage	1000 V AC for 1 min. (between lead wire and case)
Ambient temperature	-10°C to 60°C
Enclosure	IEC529 standard IP67, JIS C 0920 watertight construction

Internal circuits


D-M9N/M9NV



D-M9P/M9PV



D-M9B/M9BV




Weight

Unit: g

Model		D-M9N(V)	D-M9P(V)	D-M9B(V)
Lead wire length (m)	0.5	8	8	7
	3	41	41	38
	5	68	68	63

How to Order


Standard Model Number

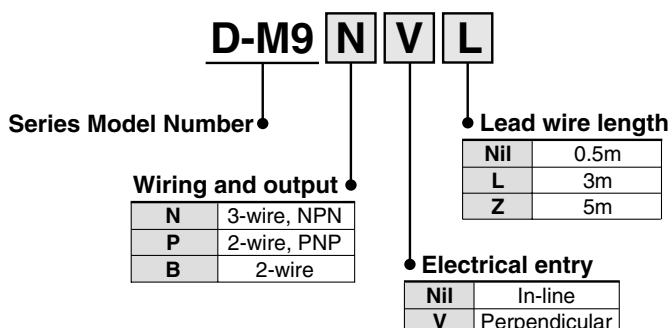


Series D-M9

Auto Switch Dimensions

D-M9□

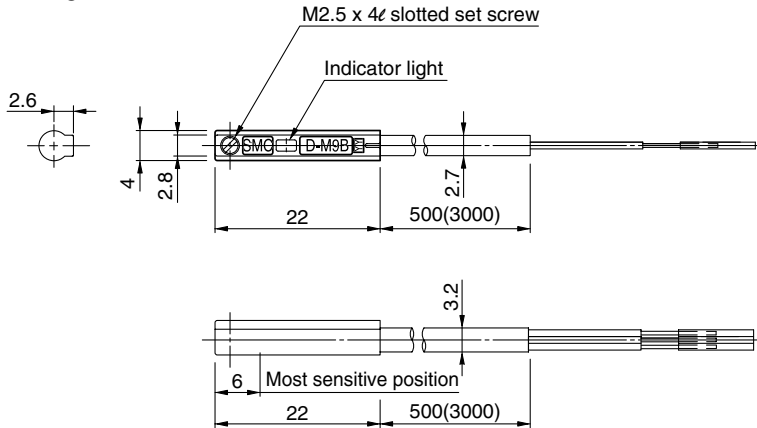

D-M9□V

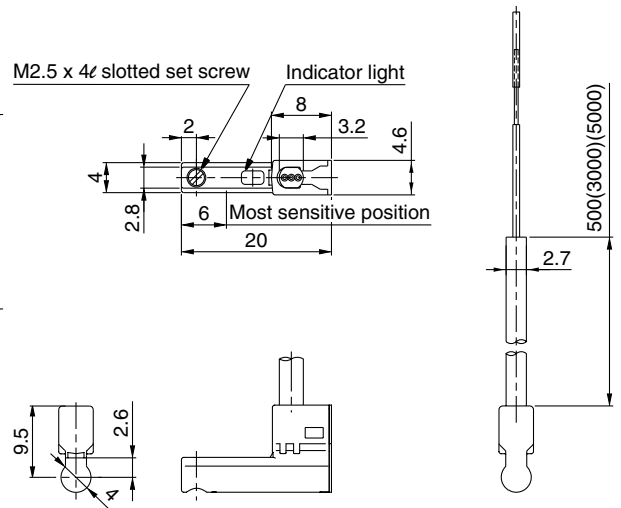

⚠ Specific Product Precautions

Be sure to read before handling. Contact SMC when the required specification is out of range.

Handling

⚠ Caution

Observe the following precautions when handling the product.


- The D-M9 series of auto switches is not overcurrent-protected. Faulty wiring or short circuit may result in breakage or burning-out of the switch.
- When stripping the cable clad, be careful about the orientation of the cable being stripped. The insulator may be accidentally torn or damaged depending on the orientation, as shown on the right.

- We recommend the following tools

Manufacturer	Product name	Product number
VESSEL	Wire stripper	No 3000G
Tokyo Ideal	Strip master	45-089

* The stripper for the round shape cords (ø2.0) is for a 2-wire style.

- Please do not attach the switch with any other screws than those already attached to the auto switch body.

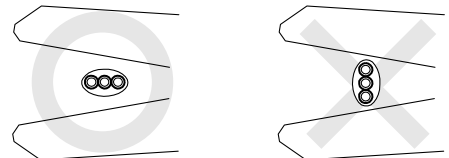

The operation range is shorter than that of the conventional models.

If the auto switch replaces the conventional model, it may not function depending on its application because the operation range is shorter. Refer to the examples below.

- In an application where at the end, the stopping position shifting range is larger than the operation range. For example, pushing a work against something, or pressing a work into a hole, or clamping a work.
- In an application where the auto switch is used to detect an intermediate stopping position. (Detecting time is shortened.)

Note) Please contact SMC for the operation range details for each actuator.


The switch is damaged instantly when a load is shortened since short circuit protection is not built-in. Pay special attention to avoid reversing the connection of the brown lead of the power supply line and the black output line connection.

Series MHW2

ø20, ø25, ø32, ø40, ø50



How to Order

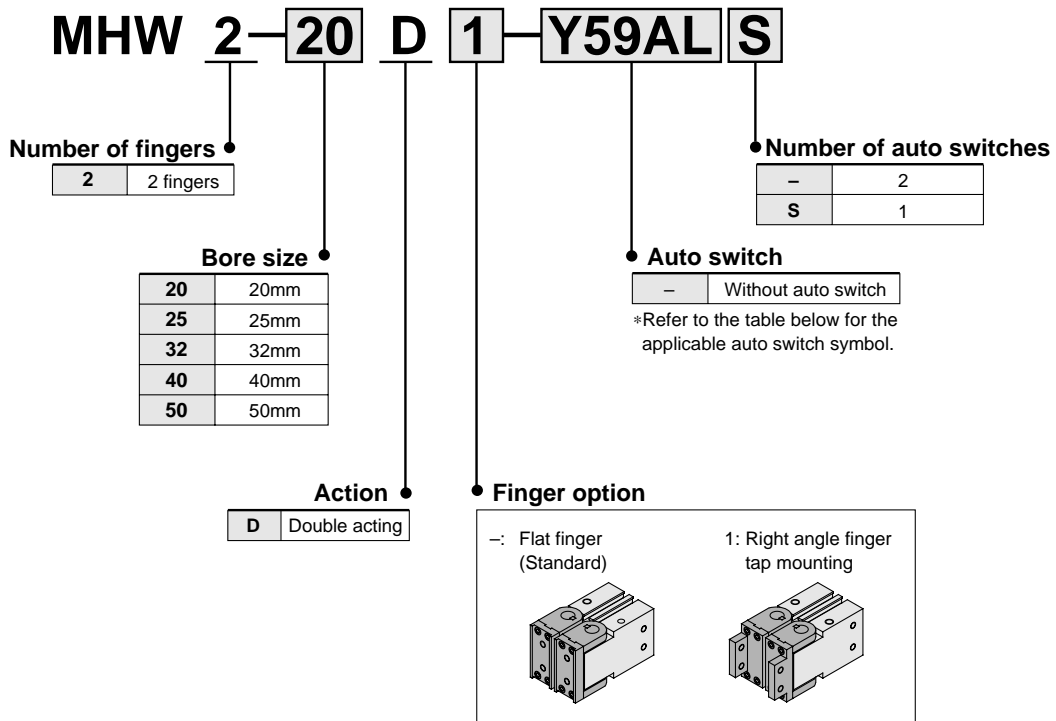

Applicable auto switches

Type	Special function	Electrical entry	Indicator	Wiring (Output)	Load voltage		Symbol		Lead wire length (m)*		Applicable load			
					DC	AC	Electrical entry		0.5 (–)	3 (L)				
							Perpendicular	In-line						
Solid state	–	Grommet	With	3 wire (NPN)	24V	5V 12V	Y69A	Y59A	●	●	Relay PLC			
				3 wire (PNP)					12V	Y7PV		Y7P	●	●
				2 wire						Y69B		Y59B	●	●
	Diagnosis (2 color indication)			5V 12V	3 wire (NPN)	–	Y7NWV	Y7NW	●	●				
					3 wire (PNP)		Y7PWV	Y7PW	●	●				
				Water resistance (2 color indication)	12V	2 wire	Y7BWV	Y7BW	●	●				
							–	Y7BA	–	●				

*Lead wire length 0.5m----- (Example) Y59A.
3m-----L (Example) Y59AL.



Note 1) Refer to "Auto Switch Hysteresis" on p.2.8-24 when using the 2 color indication type D-Y7BAL.
Note 2) Refer to "Auto Switch Specifications" on p.2.11-1.

Specifications




Fluid	Air
Operating pressure	0.15 to 0.7MPa
Ambient and fluid temperature	-10 to 60 °C
Repeatability	±0.2mm
Max. operating frequency	ø20-25: 60c.p.m ø32 to 50: 30c.p.m
Lubrication	Not required
Action	Double acting
Auto switch (Optional) ^{Note)}	Solid state switch (3 wire, 2wire)



Note) Refer to p.2.11-1 for details of auto switch specifications.

Symbol

Double acting



Model

Model	Bore size (mm)	Effective force (Nm) ⁽¹⁾	Opening angle (Both sides)		Weight ⁽²⁾ (g)
			Opening side	Closing side	
MHW2-20D	20	0.30	180°	-5°	300
MHW2-25D	25	0.73		-6°	510
MHW2-32D	32	1.61		-5°	910
MHW2-40D	40	3.70		-5°	2140
MHW2-50D	50	8.27		-4°	5100

Note 1) At the pressure of 0.5MPa

Note 2) Not including auto switch



- Refer to the "How to Select the Applicable Model" on p.2.8-4.
- Refer to p.2.8-4 and 2.8-5 for the details of effective holding force and allowable overhanging distance.

Precaution

Be sure to read before handling.


Refer to p.0-20 and 0-21 for Safety Instructions and common precautions on the products mentioned in this catalog, and refer to p.2.0-3 and 2.0-4 for precautions on every series.

Installation

MHW

Warning

When using right angle finger tap mounting type, pay attention the interference of bolt and speed controller.

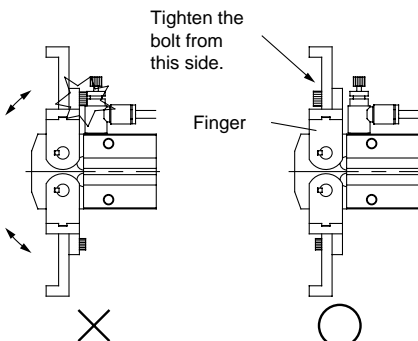


Bolt interferes with speed controller

MHW2-50₀₁

Warning

When using speed controller with One-touch fitting, use AS22 or AS23. If AS32 or AS33 is used, the finger interferes with speed controller as figure shown below. It causes malfunction.



MHZ2

MHZJ2

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2


MHW2

MRHQ

Auto switch

Series MHW2

Construction

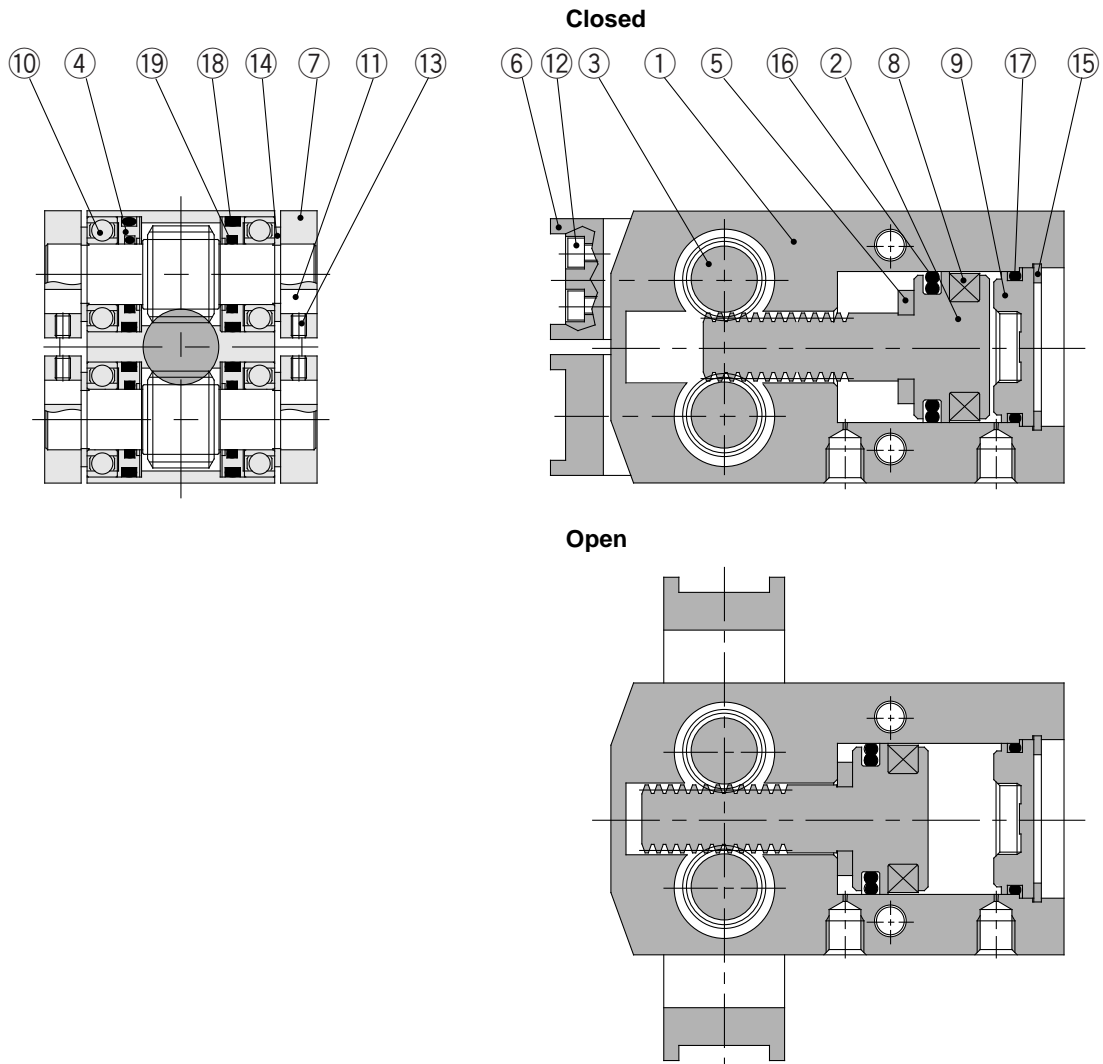

Component Parts

No.	Description	Material	Note
①	Body	Aluminum alloy	Hard anodized
②	Piston	Stainless steel	Nitriding
③	Pinion gear	Carbon steel	Heat treatment
④	Seal cover	Brass	
⑤	Bumper	Urethane rubber	
⑥	Finger (A)	Carbon steel	
⑦	Finger (B)	Carbon steel	
⑧	Rubber magnet	Synthetic rubber	

Component Parts

No.	Description	Material	Note
⑨	Cap	ø20, 25: Resin	
		ø32 to 50: Aluminum alloy	Hard anodized
⑩	Ball bearing	Carbon steel	Shield type
⑪	Key	Carbon steel	
⑫	Hexagon socket head screw	Carbon steel	
⑬	Hexagon socket cap screw	Carbon steel	
⑭	C-shape snap ring	Carbon steel	
⑮	C-shape snap ring	Carbon steel	


Replacement Parts: Seal Kits

No.	Description	Material	Kit No.				
			MHW2-20D	MHW2-25D	MHW2-32D	MHW2-40D	MHW2-50D
⑬	Seal Kit	NBR	MHW20-PS	MHW25-PS	MHW32-PS	MHW40-PS	MHW50-PS
⑭							
⑮							
⑯							



MHW2-20D

Flat finger (Standard)

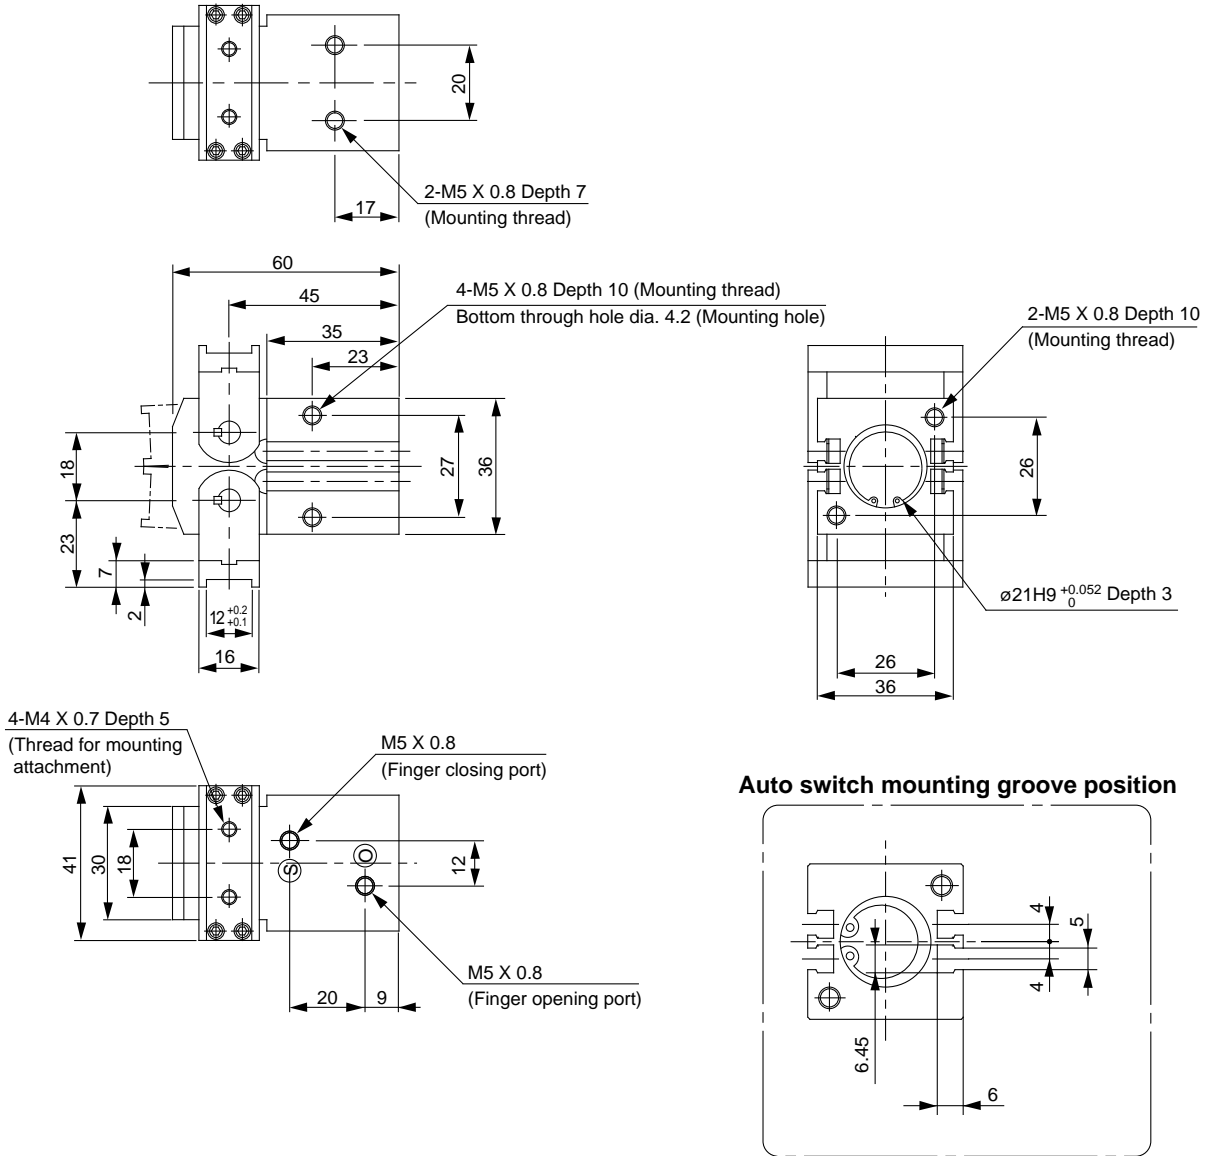

MHW2-20D1

Right angle finger




- MHZ2
- MHZJ2
- MHQ
- MHL2
- MHR
- MHK
- MHS
- MHC2
- MHT2
- MHY2
- MHW2**
- MRHQ
- Auto switch


MHW2-20D.....SMHW2, #1
MHW2-20D1.....SMHW2, #6



MHW2-32D
Flat finger (Standard)

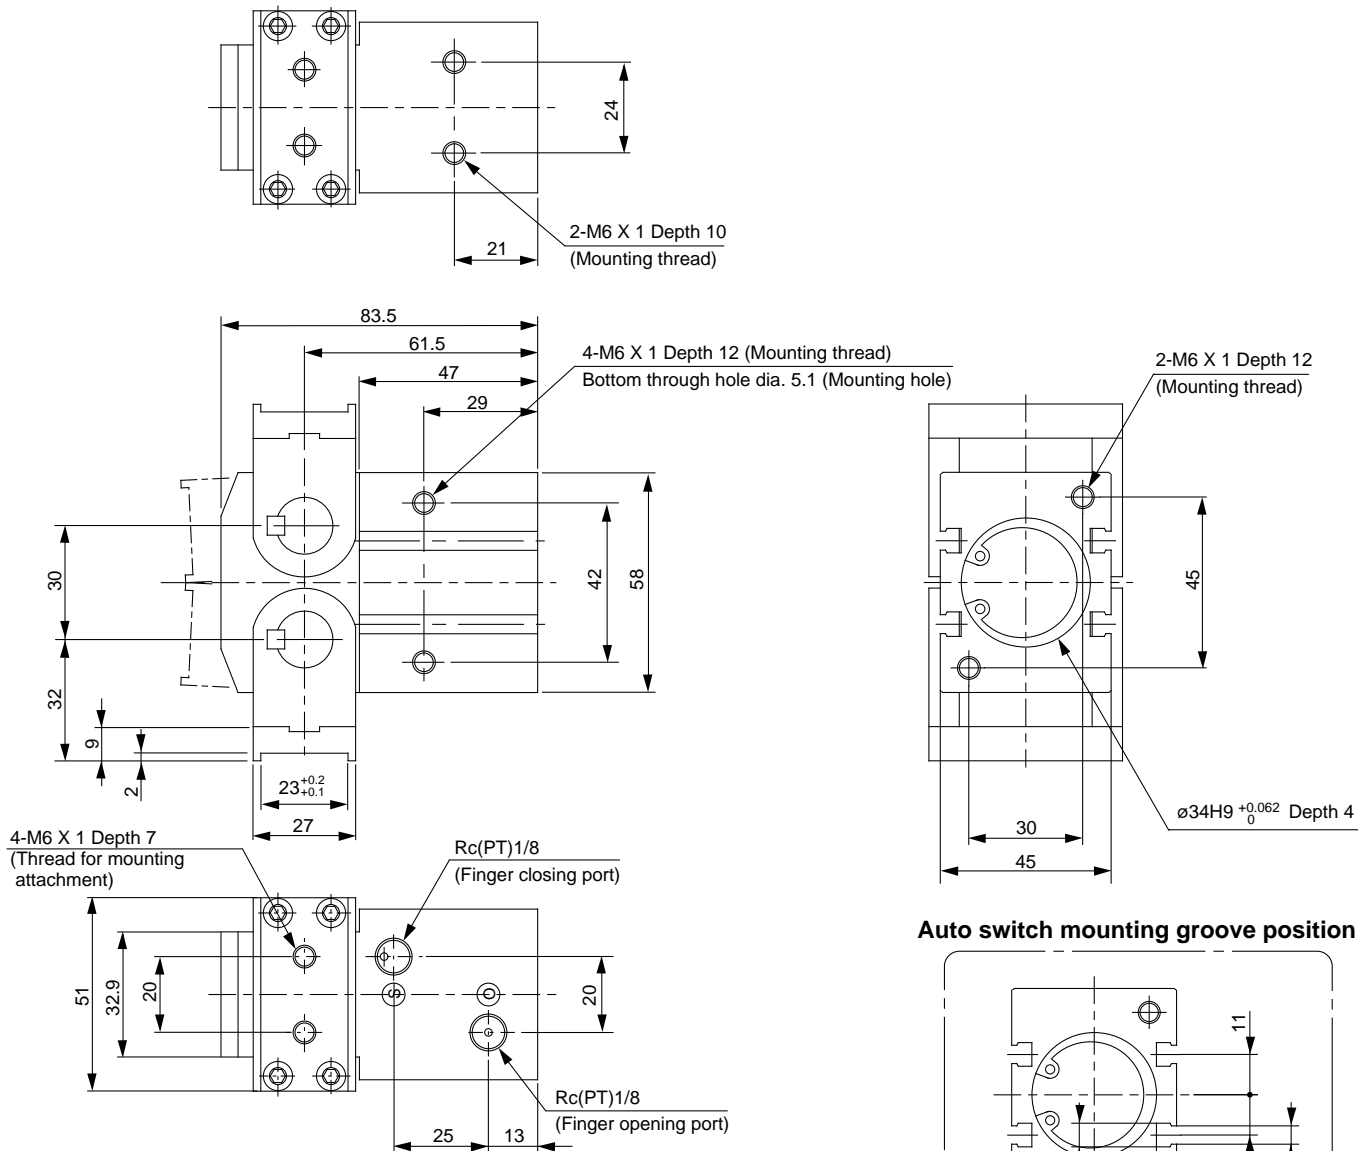

MHW2-32D1
Right angle finger

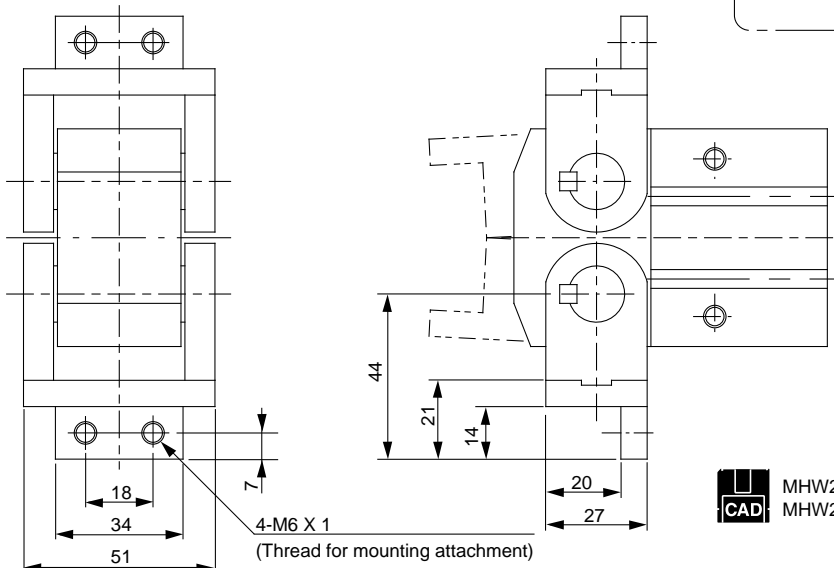

- MHZ2
- MHZJ2
- MHQ
- MHL2
- MHR
- MHK
- MHS
- MHC2
- MHT2
- MHY2
- MHW2**
- MRHQ
- Auto switch

MHW2-32D.....SMHW2, #3
MHW2-32D1.....SMHW2, #6


Series MHW2

Dimensions




MHW2-40D

Flat finger (Standard)

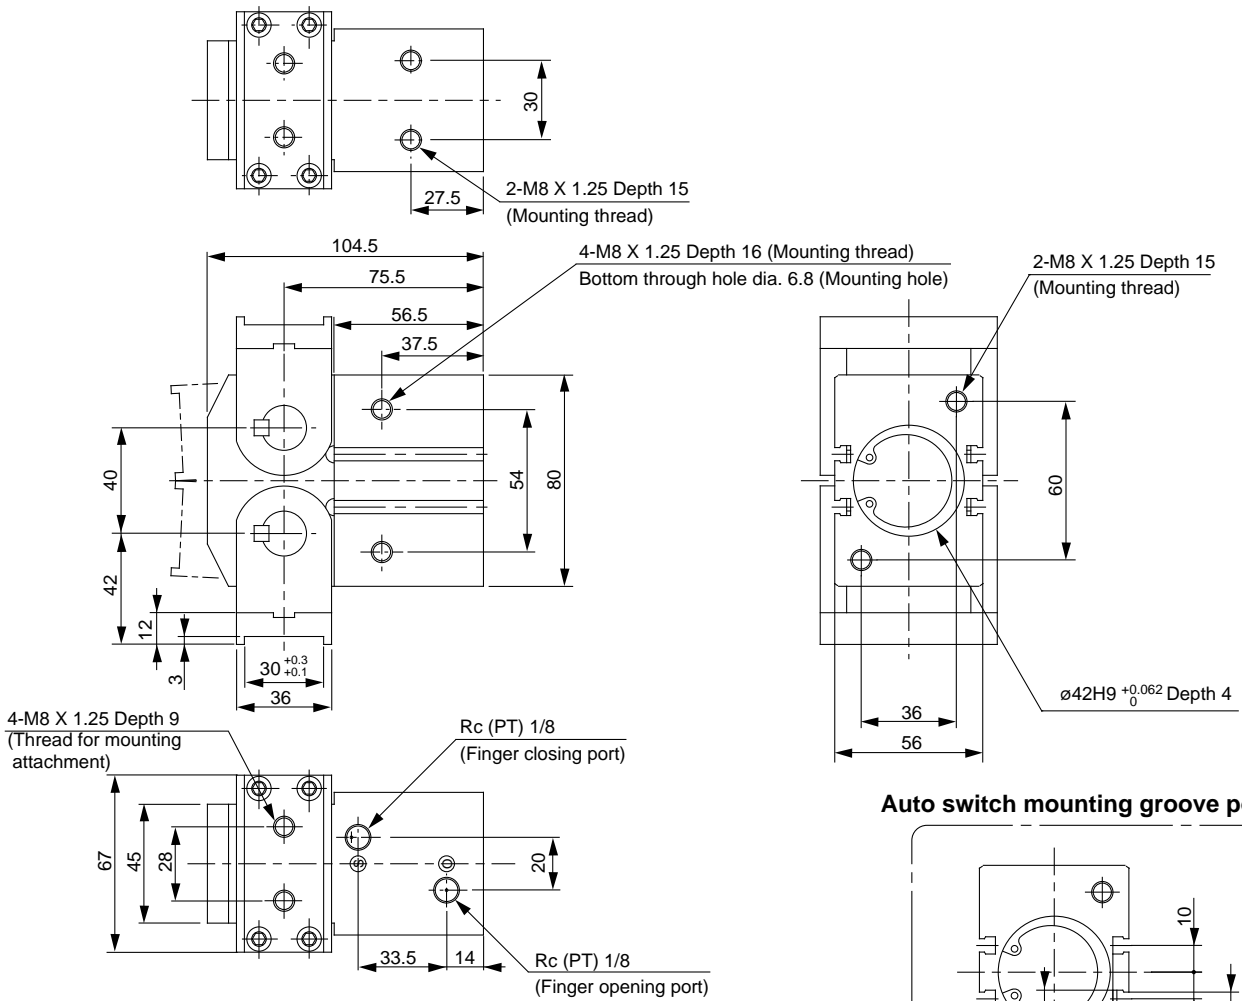


Auto switch mounting groove position

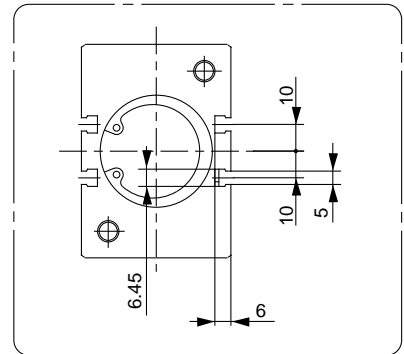

MHW2-40D1


Right angle finger

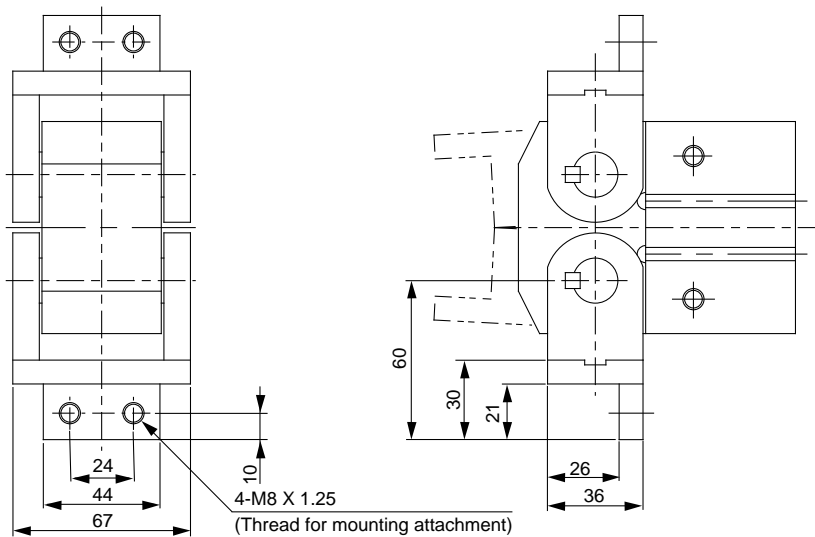


MHW2-40D.....SMHW2, #4
MHW2-40D1.....SMHW2, #6



MHW2-50D
Flat finger (Standard)

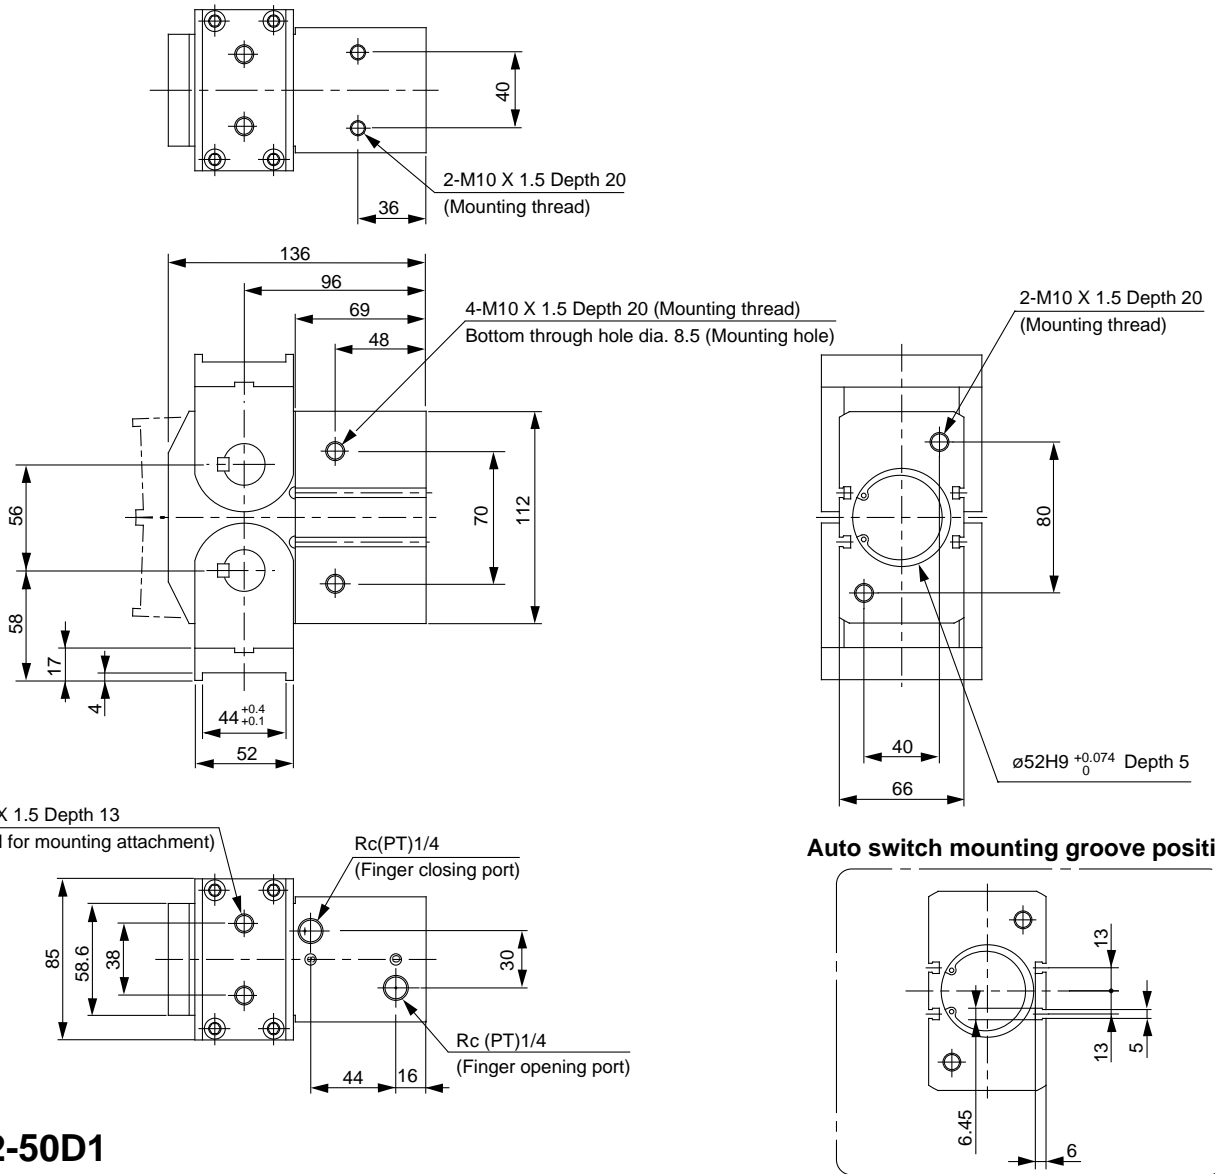

MHW2-50D1
Right angle finger

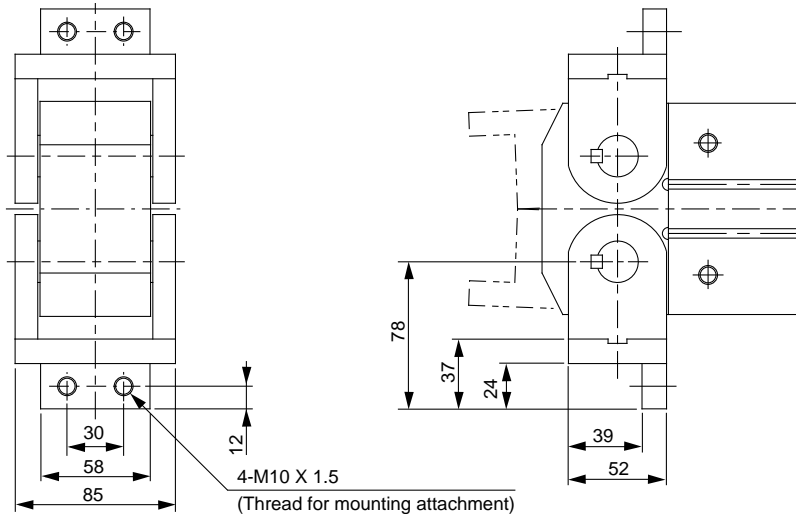

MHZ2

MHZJ2

MHQ

MHL2

MHR

MHK

MHS

MHC2

MHT2

MHY2

MHW2


MRHQ

Auto switch

Series MHW2

Setting Method of Auto Switch


To set the auto switch, insert the auto switch into the installation groove of the gripper from the direction indicated in the following drawing. After establishing the position, tighten the attached switch mounting screw with a straight bladed watchmakers screwdriver.

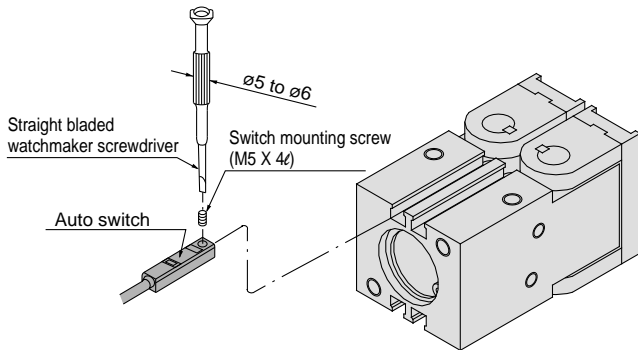

Note) Use a watchmakers screwdriver with a grip diameter of 5 to 6mm to tighten the auto switch mounting screw. Use a tightening torque of 0.05 to 0.1Nm. As a rough guide, tighten the screw an additional 90° after feeling a tighten resistance.

Auto Switch Hysteresis


Auto switches have a differential like a micro switch. Please refer to the following table as a guide when setting auto switch positions.

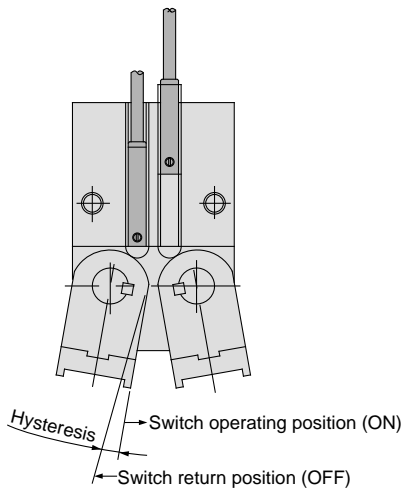


Auto switch model No. Gripper model No.	D-Y ⁵ ₆ 9 ^A _B	D-Y7 ^N _B W (V)		D-Y7BA	
		Red light at ON	Green light at ON	Red light at ON	Green light at ON
MHW2-20D	4°	6°	15°	5°	11°
MHW2-25D	4°	5°	11°	4°	9°
MHW2-32D	2°	4°	9°	3°	7°
MHW2-40D	2°	3°	6°	2°	5°
MHW2-50D	2°	3°	5°	2°	4°

Protrusion of Auto Switch from Body Edge


The protrusion of an auto switch from the edge of the body is shown in the table below. Use the table as a guideline for mounting.

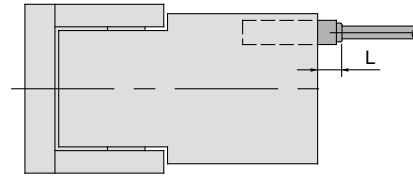

When auto switch D-Y59^A_B is used

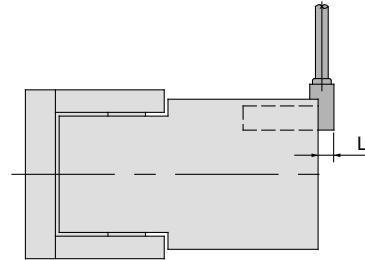

When auto switch D-Y69^A_B is used

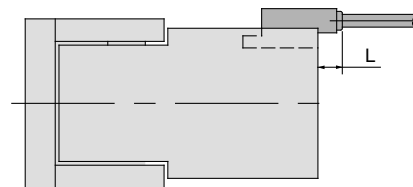

When auto switch D-Y7BAL is used

Auto switch model No.		Protrusion [mm]				Unit:mm
Gripper model No.		In-line			Perpendicular	
		D-Y59 ^A _B	D-Y7 ^N _B W	D-Y7BA	D-Y69 ^A _B	D-Y7 ^N _B WV
MHW2-20D	O	—	—	—	—	—
	S	7	12	12	5	12
MHW2-25D	O	—	—	—	—	—
	S	7	11	10	5	11
MHW2-32D	O	—	—	—	—	—
	S	4	9	8	2	9
MHW2-40D	O	—	—	—	—	—
	S	3	8	7	1	8
MHW2-50D	O	—	—	—	—	—
	S	1	6	5	—	6